



# Zen Smart IDSR Project

September 2023



### Zen Digital Integration Platform

IoT device and application enablement platform for Energy Service Providers



### Telecom Operators & CSPs

A complete end-to-end view of the network as the foundation to systems consolidation




### Government & Large Enterprise

Zen Fault and Performance management of large, evolving, enterprise and safety critical networks



# SysMech & ESC Living Lab

## Digital Integration Platform (DIP)

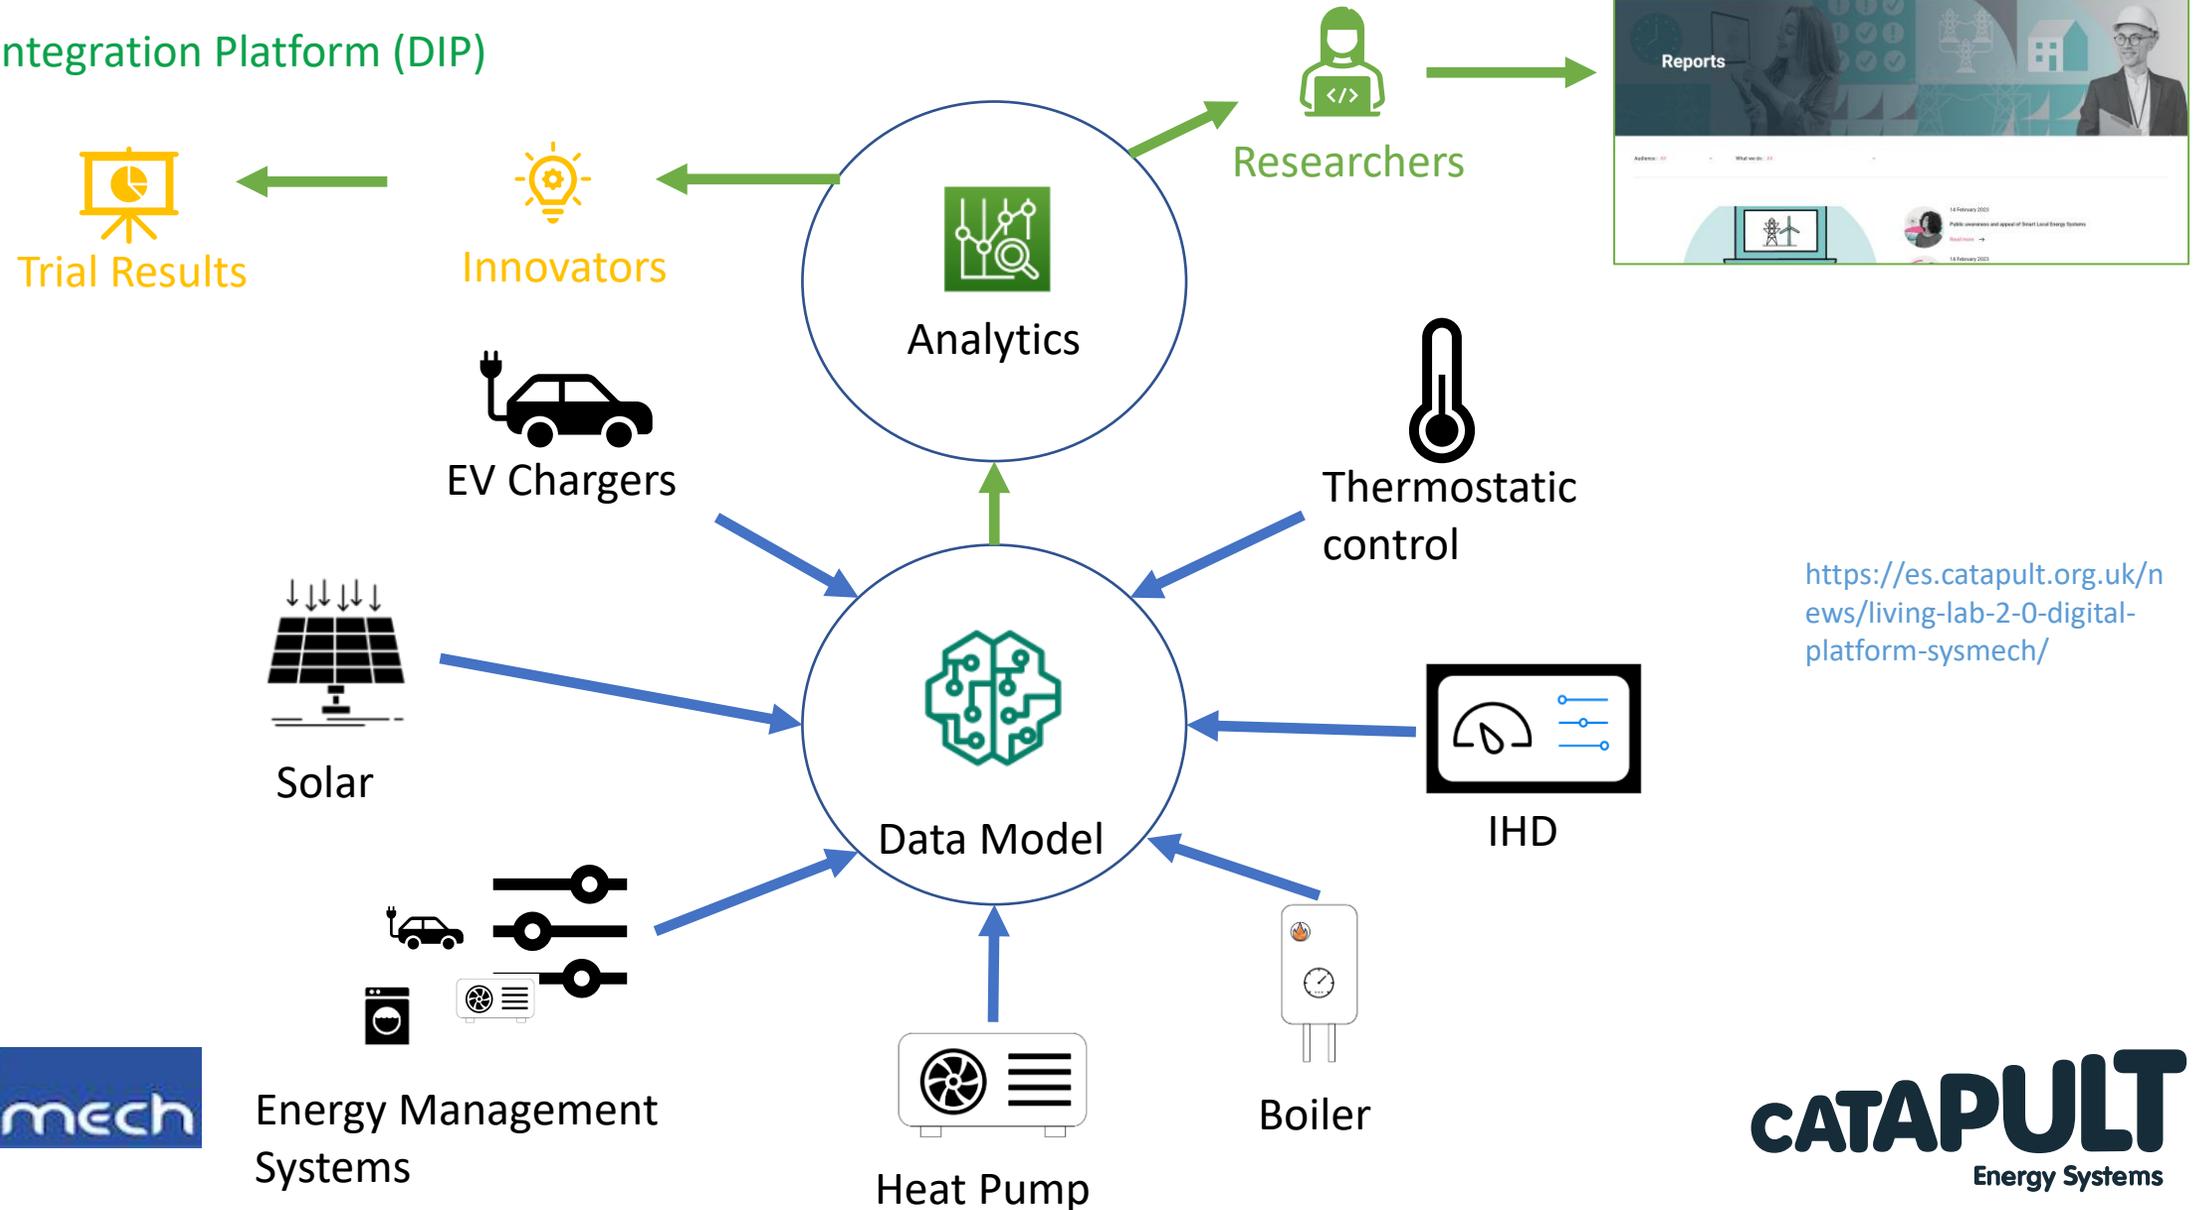



<https://es.catapult.org.uk/news/living-lab-2-0-digital-platform-sysmech/>



# Interoperable Demand Side Response (IDSR) Programme



## Competition Aim

Design and develop ESAs, including Customer Energy Manager (CEM), and demand side response service provider (DSRSP) platforms according to the PAS 1878 and PAS 1879 technical frameworks:

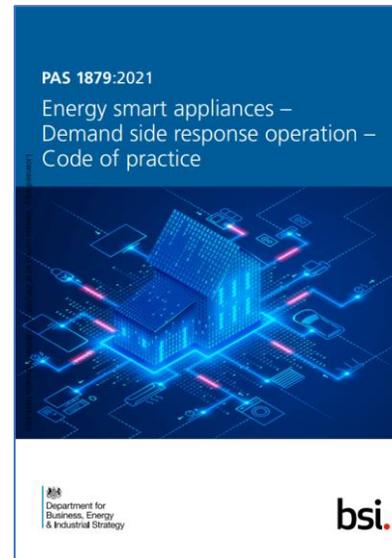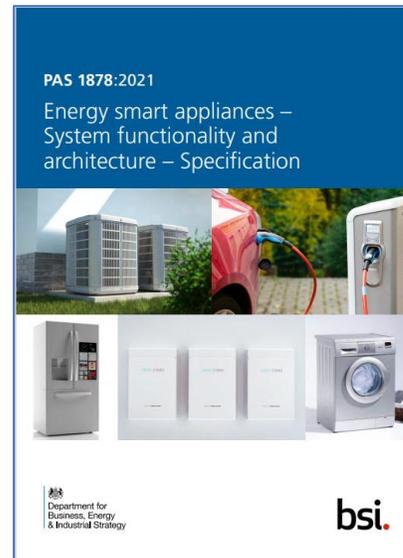

*The IDSR programme is part of the up to £65m [Flexibility Innovation Programme](#) within the Department for Energy Security and Net Zero's £1 billion [Net Zero Innovation Portfolio](#).*

# EV & Heat pump deployed capacity - UK

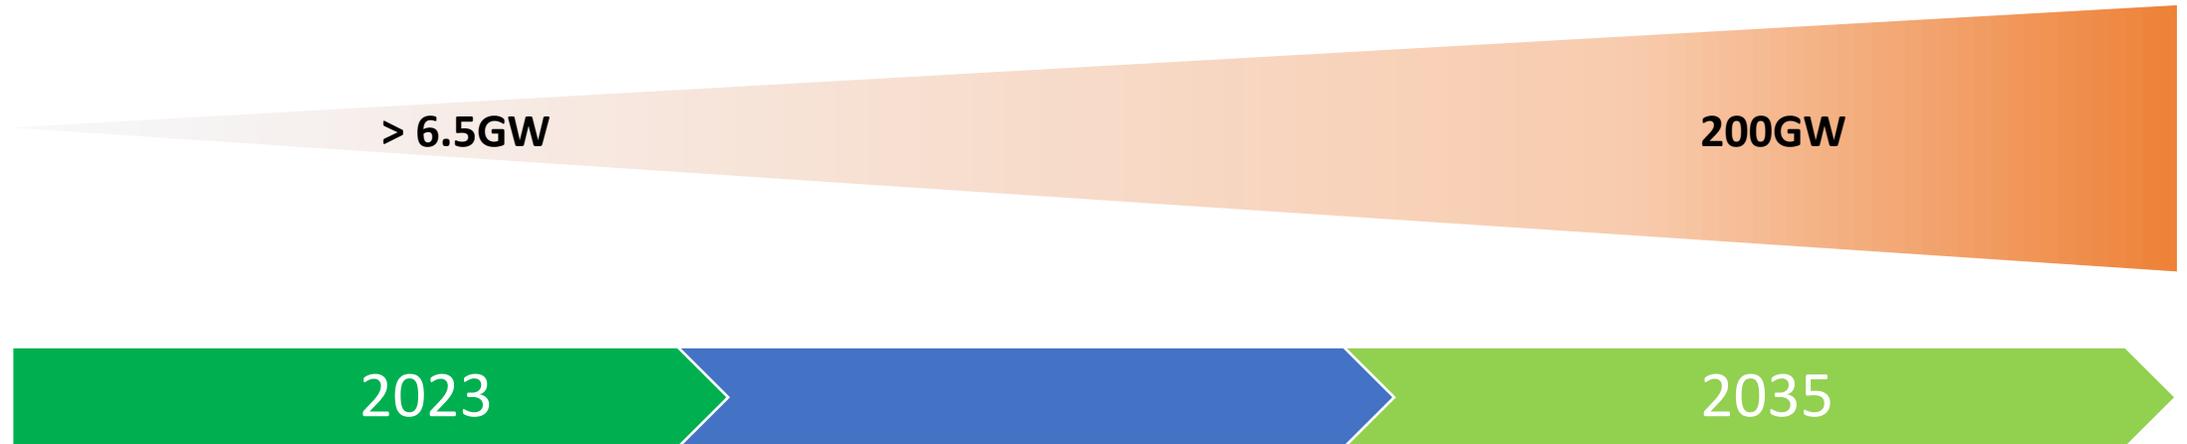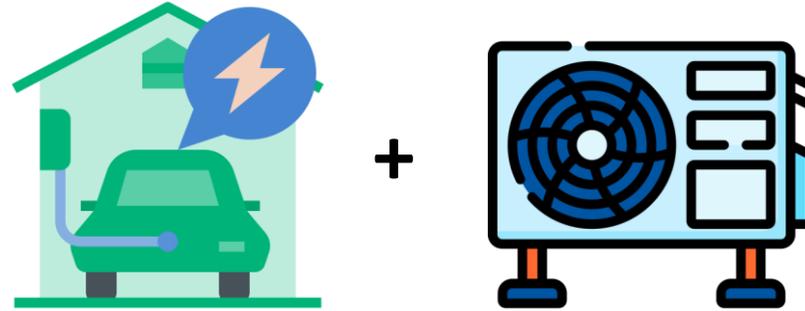


Capacity projections based on figures from "STATE OF UK FLEXIBILITY INNOVATION" (Draft, ESC, February 2023)

[Air source heat pump icons created by Freepik - Flaticon](#)

[Ev icons created by GOWI - Flaticon](#)

# Solar & Battery deployed capacity - UK

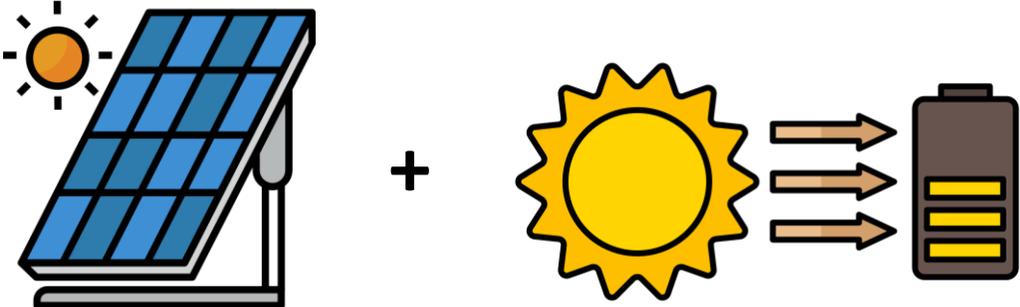

Capacity projections based on figures from "STATE OF UK FLEXIBILITY INNOVATION" (Draft, ESC, February 2023)

[Solar panel icons created by small.smiles - Flaticon](#)

[Solar power icons created by cah nggunung - Flaticon](#)

# IDSR Programme (Interoperable Demand Side Response)

## Core Principles

Principle	Description
Interoperability	The ability of an energy smart appliance (ESA) to be operated by any authorised DSR Service Provider for DSR services.
Data privacy	The secure transmission and storage of data on the device or with any controlling party
Grid-stability	The prevention and mitigation of negative impacts to the energy system caused by inappropriate operation of ESAs
Cyber-security	The appropriate protection of an ESA, systems and data from unauthorised access, to reduce the risk of cyber attack

Key that the data collected is standardised and interoperable.

Includes data governance

ESAs update flexibility information to DSRSPs whenever their status changes whilst respecting consumer wishes

# OpenADR and PAS1878


## Relationship

- PAS 1878 references a subset of OpenADR 2.0b

OpenADR Terminology	PAS Terminology
<b>VTN (Virtual Top Node)</b>	<b>DSRSP (Demand Side Response Service Provider)</b>
<b>VEN (Virtual End Node)</b>	<b>CEM (Customer Energy Manager)</b>

# Solution Overview

## Components

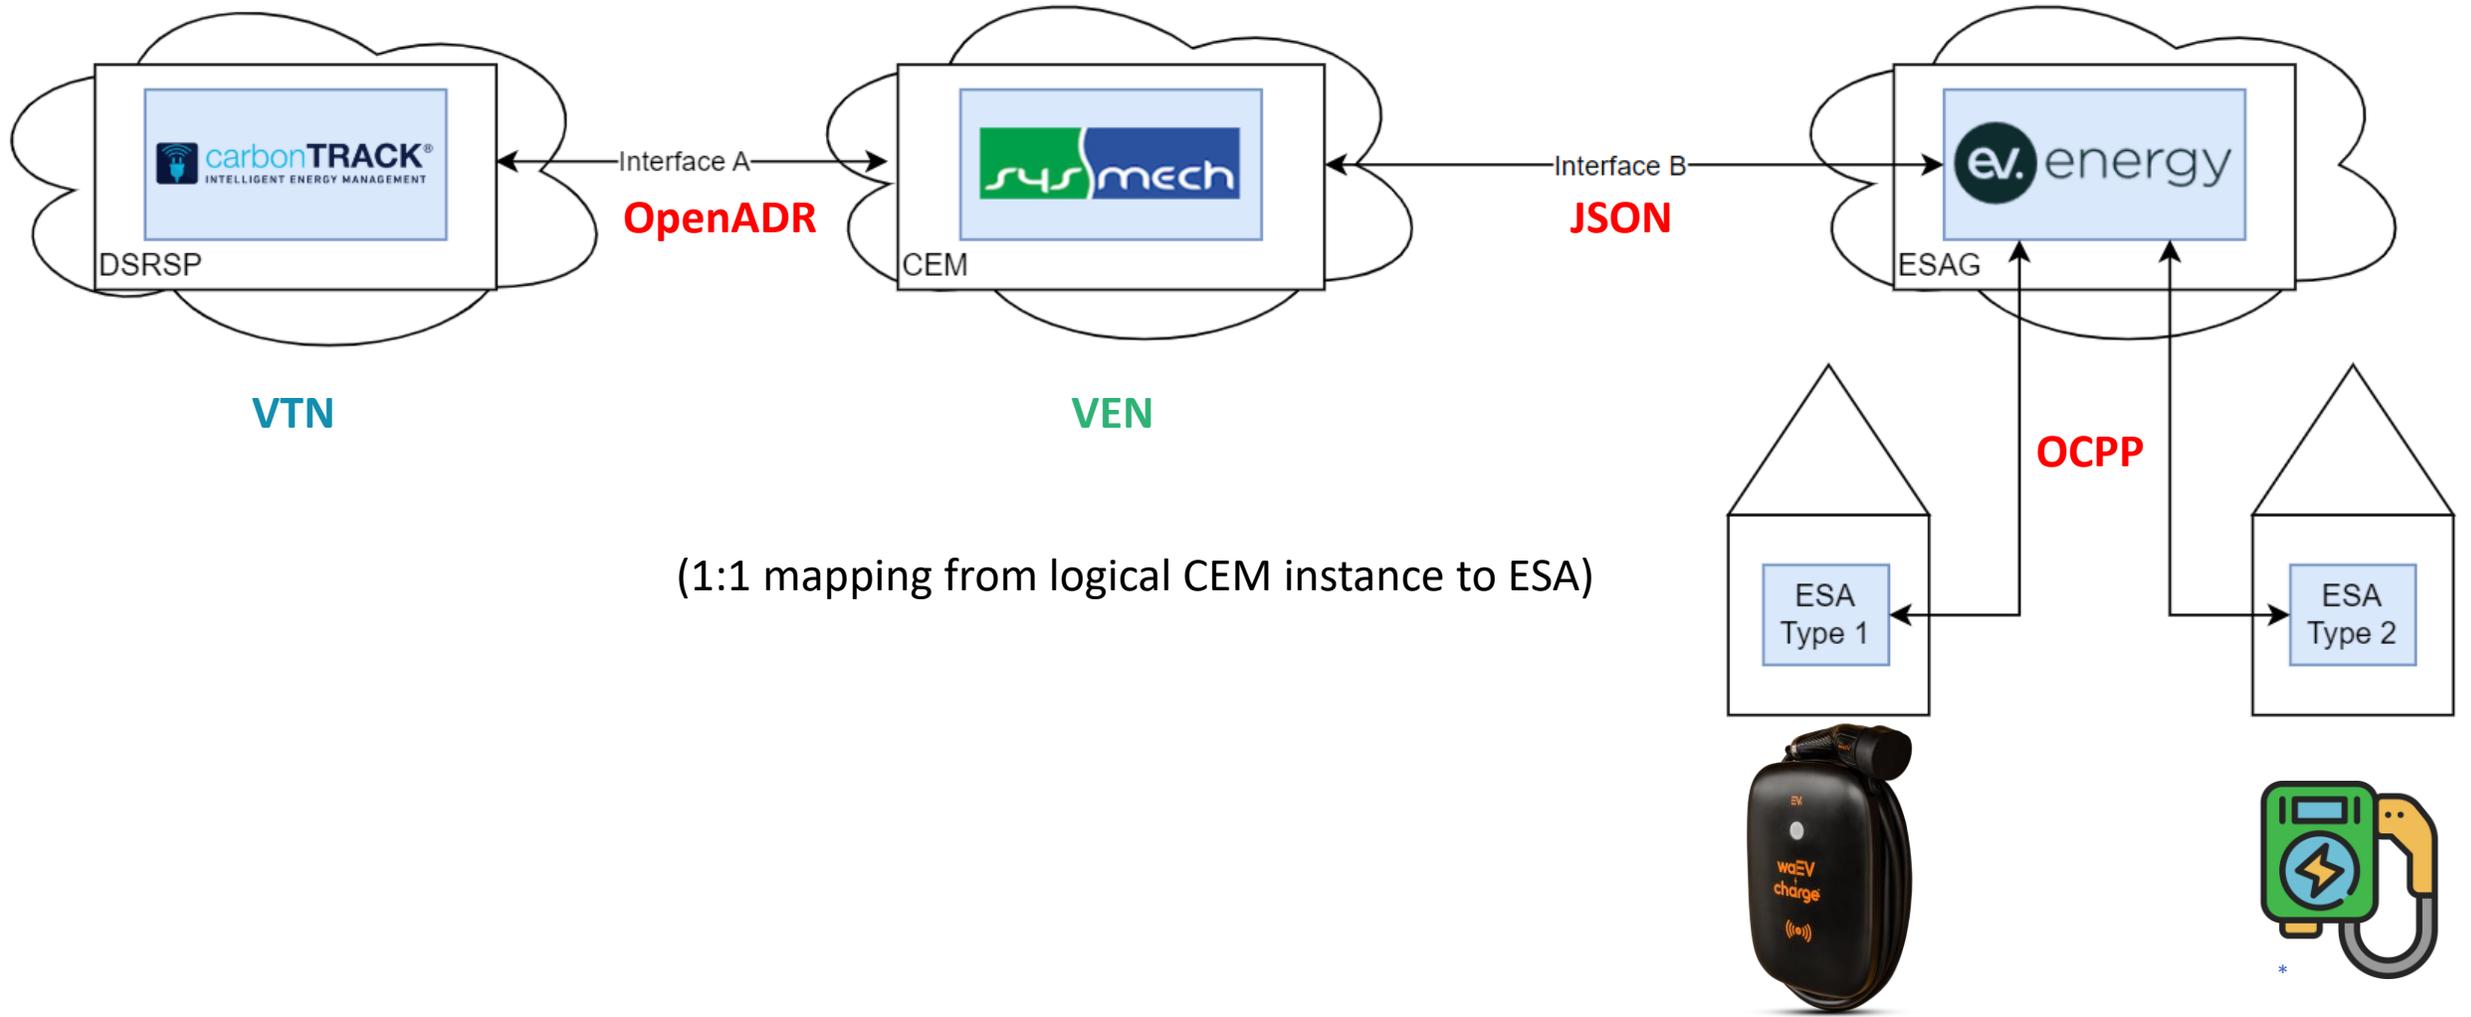

# CEM

## Benefits of a cloud hosted CEM

- Can support multiple different Interface B protocols and ESA types (not limited to EV chargers only)
- Not resource constrained
- Simplified patching and maintenance
- Can be hosted by a carbon neutral data centre
- Avoids additional clutter in the home (hardware gateways may still be required for non-IP devices)
- Could also function as a HEMS, more compelling when multiple ESA types are connected, can self-manage a cohort of devices based on consumer preferences in terms of tariff / environmental impact.



# Solution Overview


## Message Flows

	DSRSP	CEM	ESAG
Consumer Registration with DSRSP	✓	N/A	N/A
CEM and ESA Mutual Authentication	N/A	✓	✓
Device registration of the CEM and the ESA with the DSRSP	✓	✓	✓
Initialization	✓	✓	✓
Normal Operation	✓	✓	✓
Exception Conditions	✓	✓	✓
Deregistration	✓	✓	✓



# DSRSP

## carbonTRACK

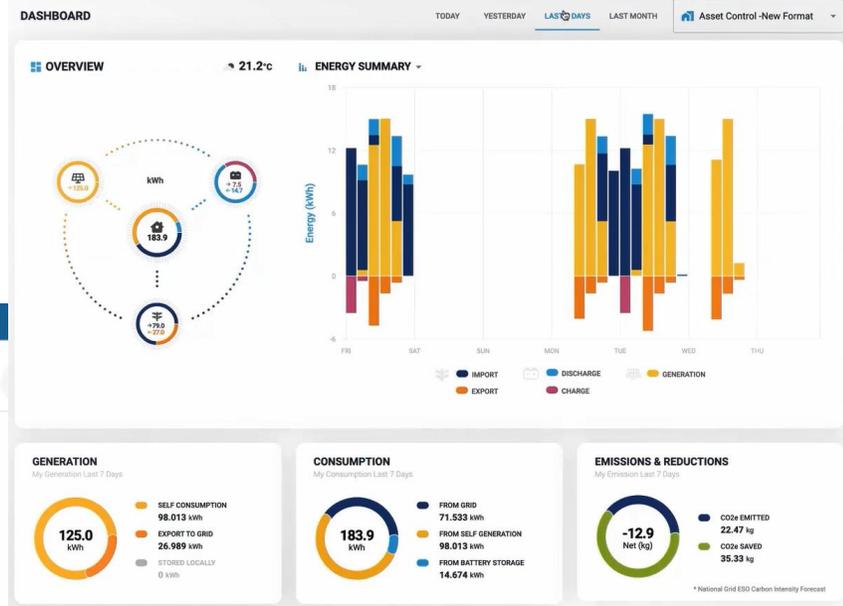

### Create an Asset

1 Select Connection 2 Enter Asset Details 3 Complete

Create Name: My EV Charger Asset Type: EV Charger

CEM Service Provider: SysMech

Please confirm your CEM details

CEM Manufacturer: XXXXXXXXXXXX

CEM Serial Number: 4fN-62NkETICreaFHU-HRaR

VERIFY

### RESEARCH PARK B6

#### Create an Asset



1 Select Connection 2 Enter Asset Details 3 Complete




Boundary Configure No

**carbonTrack**  
Assets that are subscribed and connected to our product solutions

**3rd Party Platform**  
Select platform: SysMech



NEXT

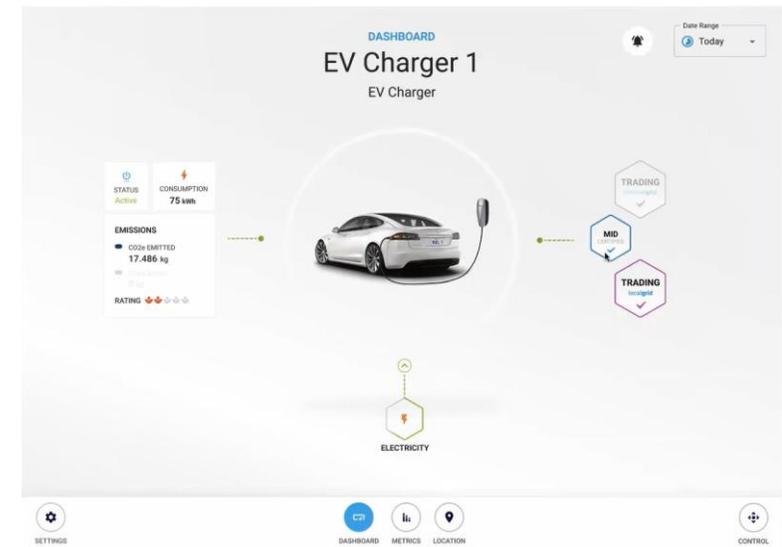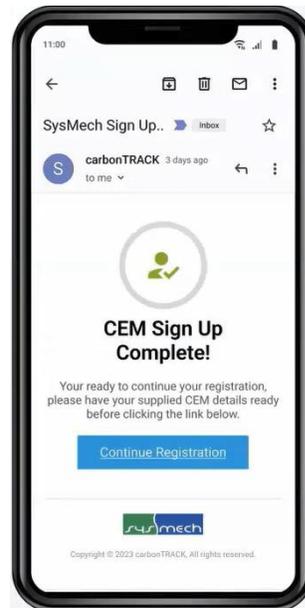

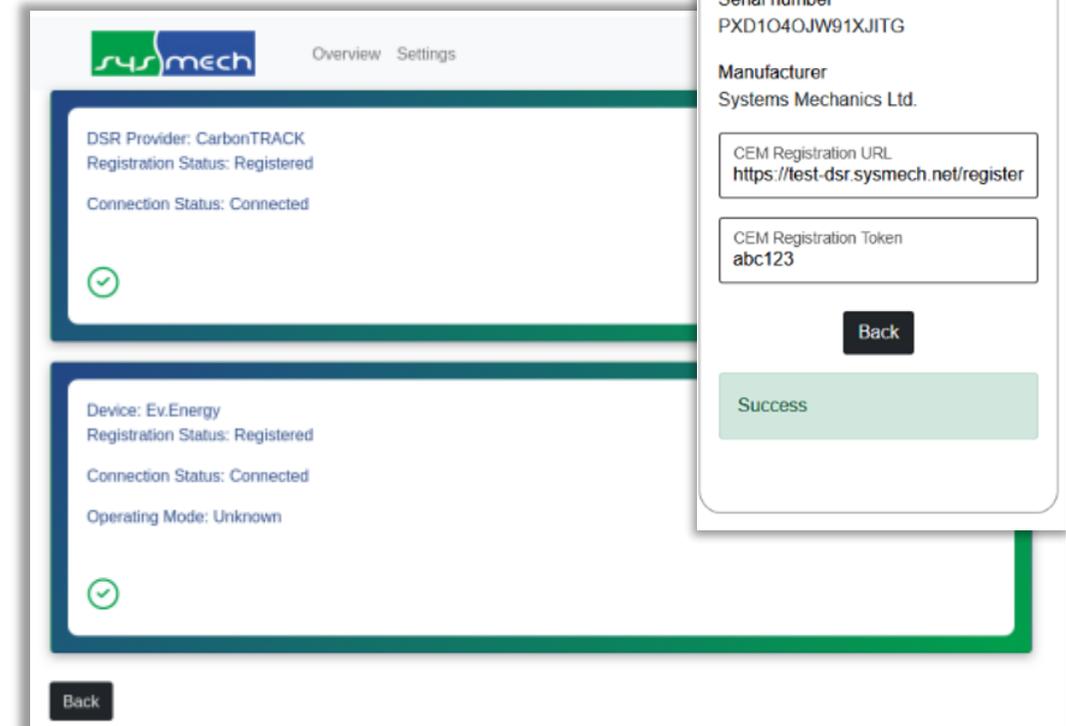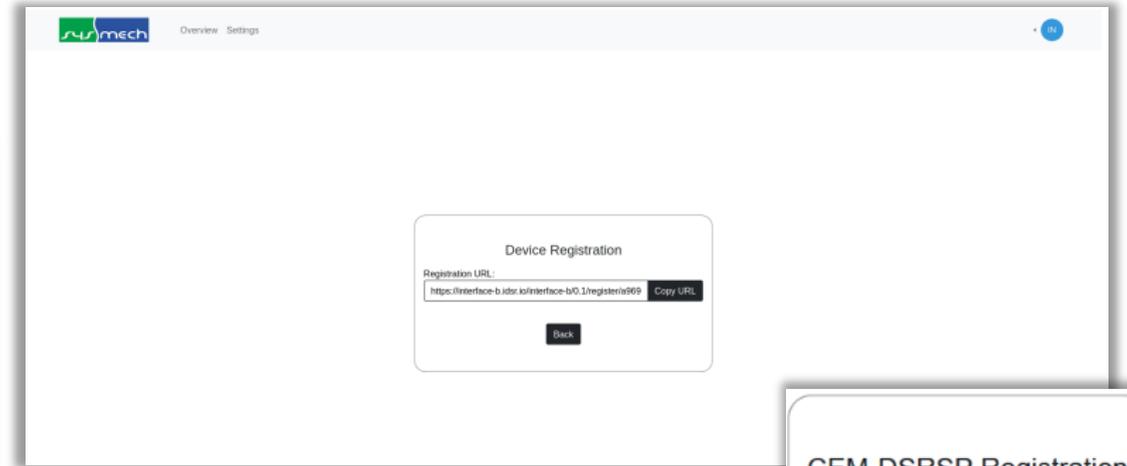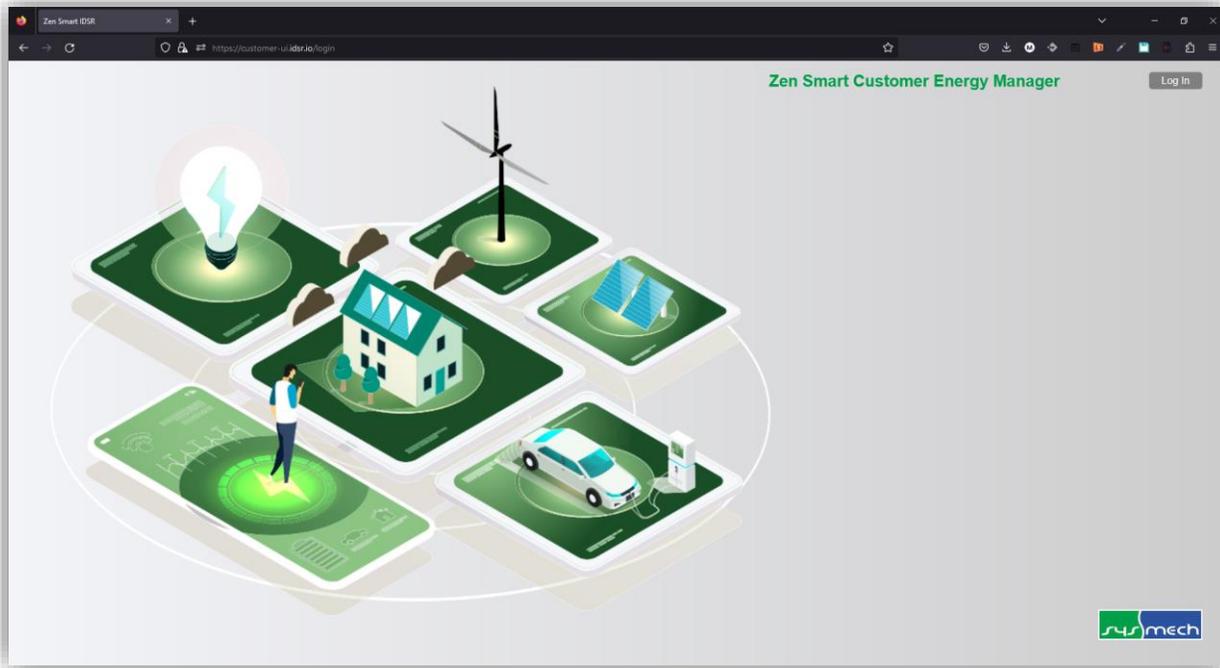

# ESAG & ESA's


ev.energy

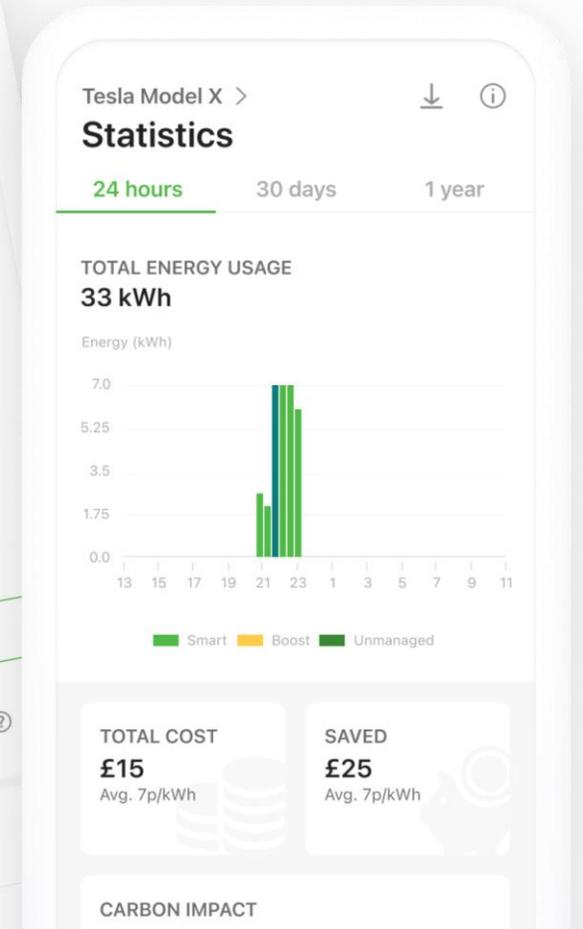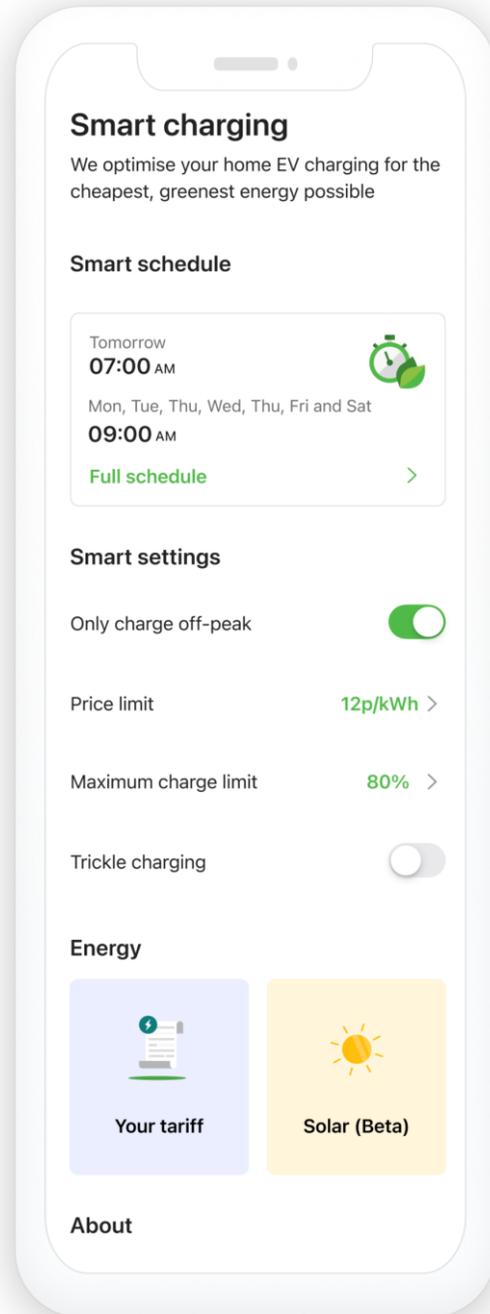

# Power Profiles

PAS1878 – Section 5.5.4

**Figure 10** – Representation of the three required profiles

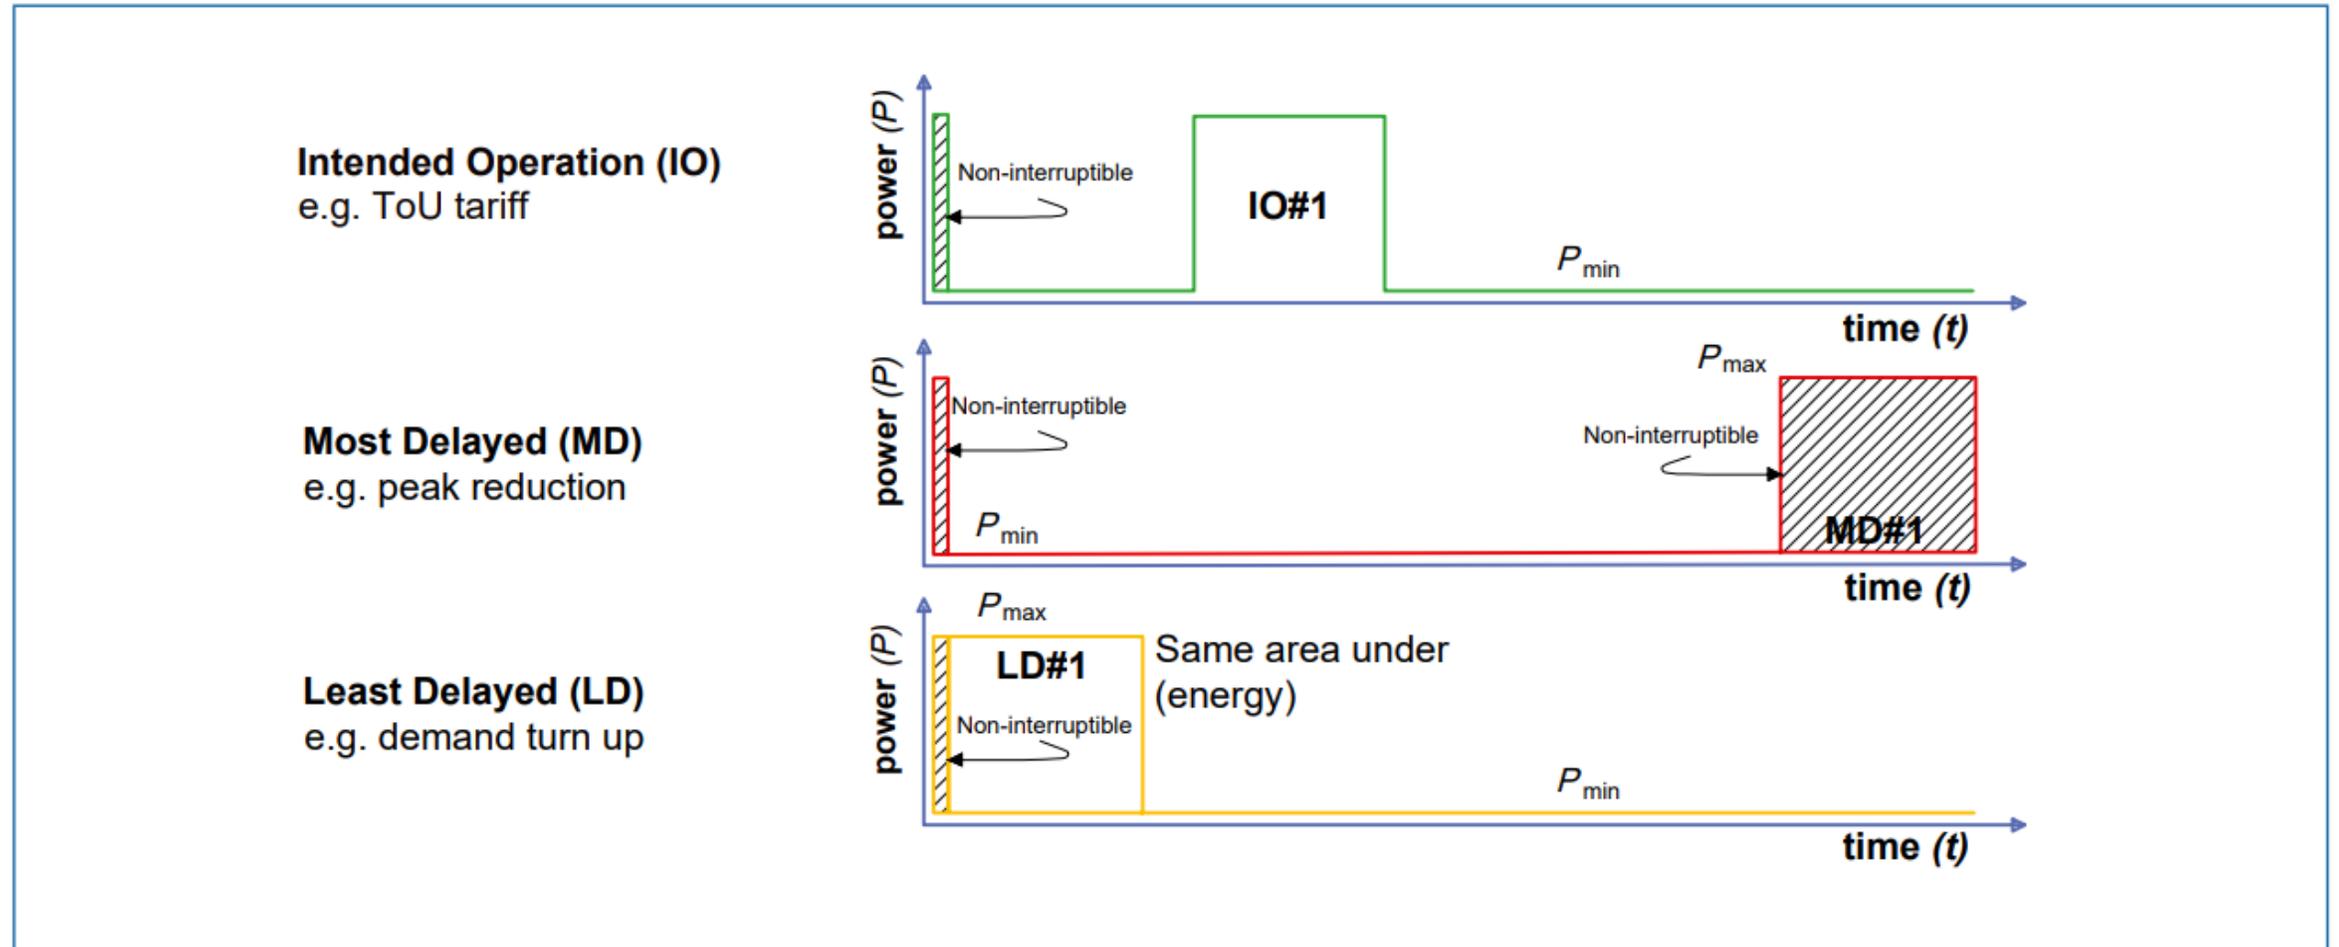

# OpenADR

## Benefits for Interface A

- Defined, accepted, open standard
- Should increase code quality and reduce in-house development effort
- Limits vendor lock-in
- Used internationally



# OpenADR

## Our Implementation of Interface A

- “Report Only” VEN, which only includes the following services:
  - EiReport
  - EiRegisterParty
- The periodic power report (Instantaneous) power values shall be implemented as described in the OpenADR 2.0 Demand Response Program Implementation Guide [17], “[A.4.2 Fast DR Scenario 2 – Typical Use Case, B profile](#)”, substituting the required reporting interval.
- PULL & PUSH VTN
- PULL VEN



# QualityLogic OpenADR test tool

## How we utilise it for Automated testing


- Containerised, so we can now run outside of Eclipse, or any other Java IDE
- REST Endpoint added so that we can remotely trigger any test case via a request (e.g. a curl command)
  - Also returns a response, including the result of the test and a tracelog, including things like the OpenADR payloads sent/received during the test
- Additional logic & endpoint added to simulate the CEM registering with a DSRSP
- Addition of custom test cases for PAS specific functionality
- Disabled user prompts, so that we can automate our test procedures
- Added XML signature signing and verification as per the “high security” profile (conformance rule 514)

<https://www.openadr.org/assets/SE%20-%20Data%20Sheet%20-%20OpenADR%20Tools.pdf>



# Project Progress

## Timeline

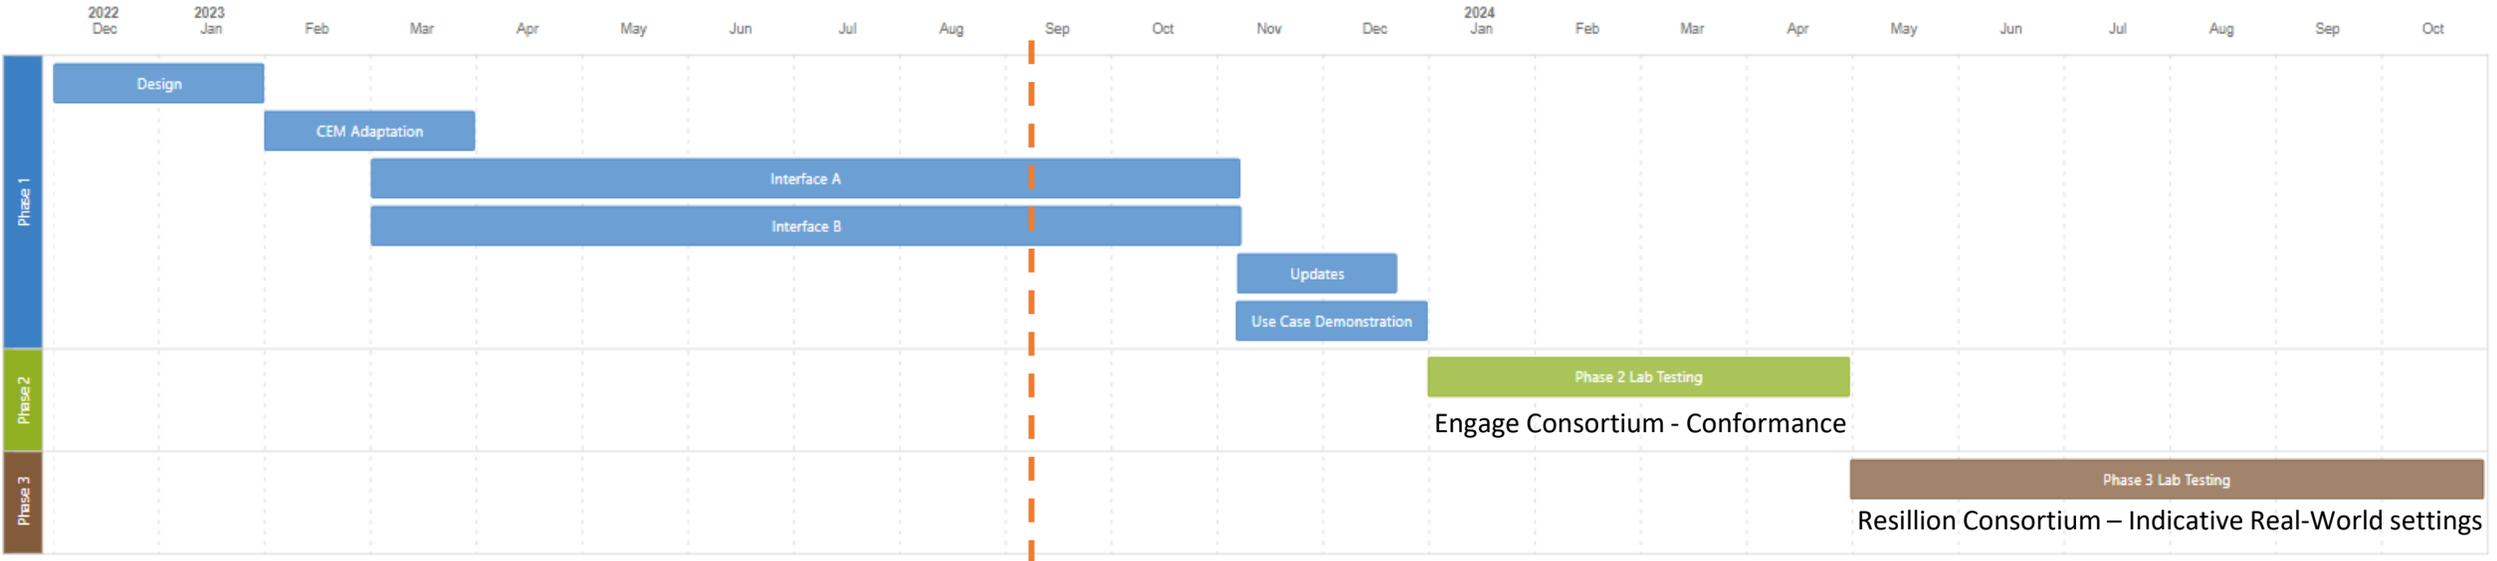



# Thank You

- Feedback and questions
- Contact SysMech at [sales@sysmech.co.uk](mailto:sales@sysmech.co.uk)